




FIG. 1

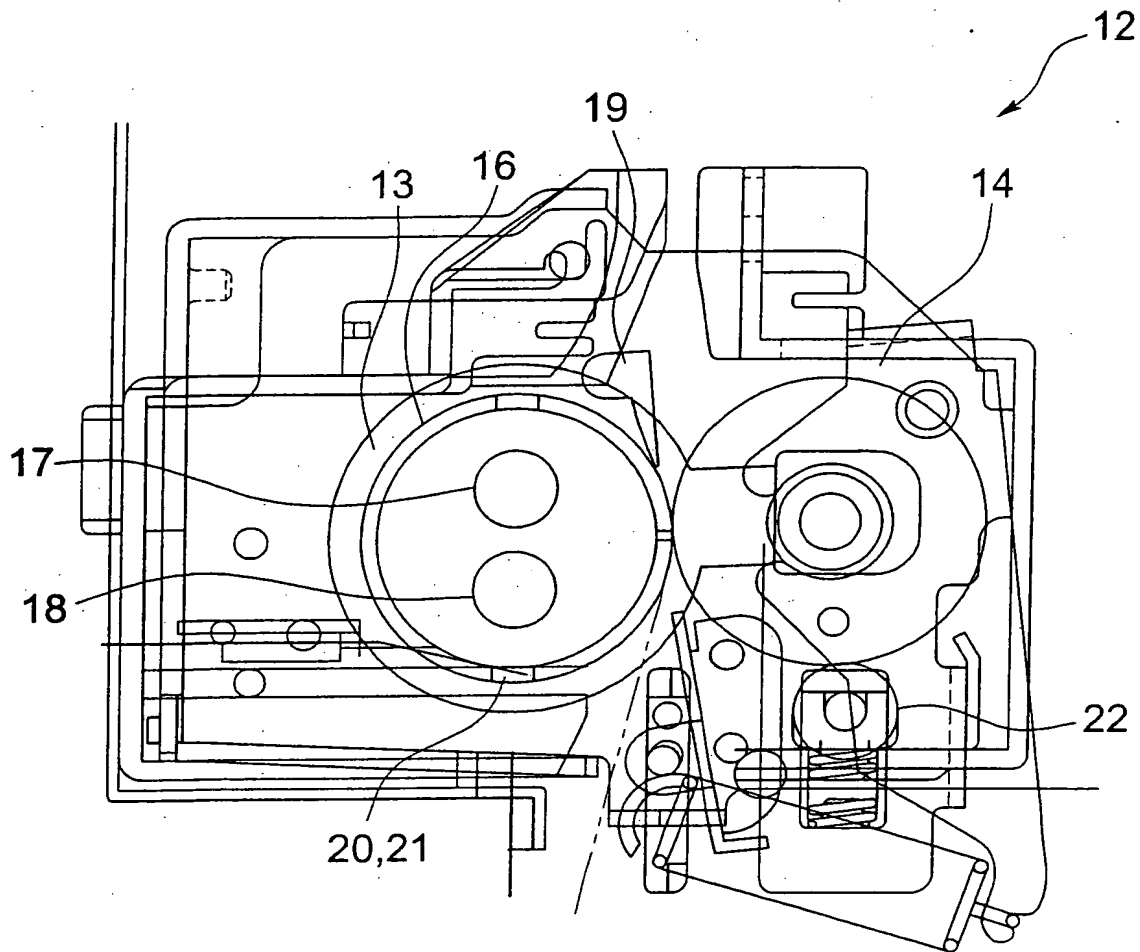


**FIG. 2**

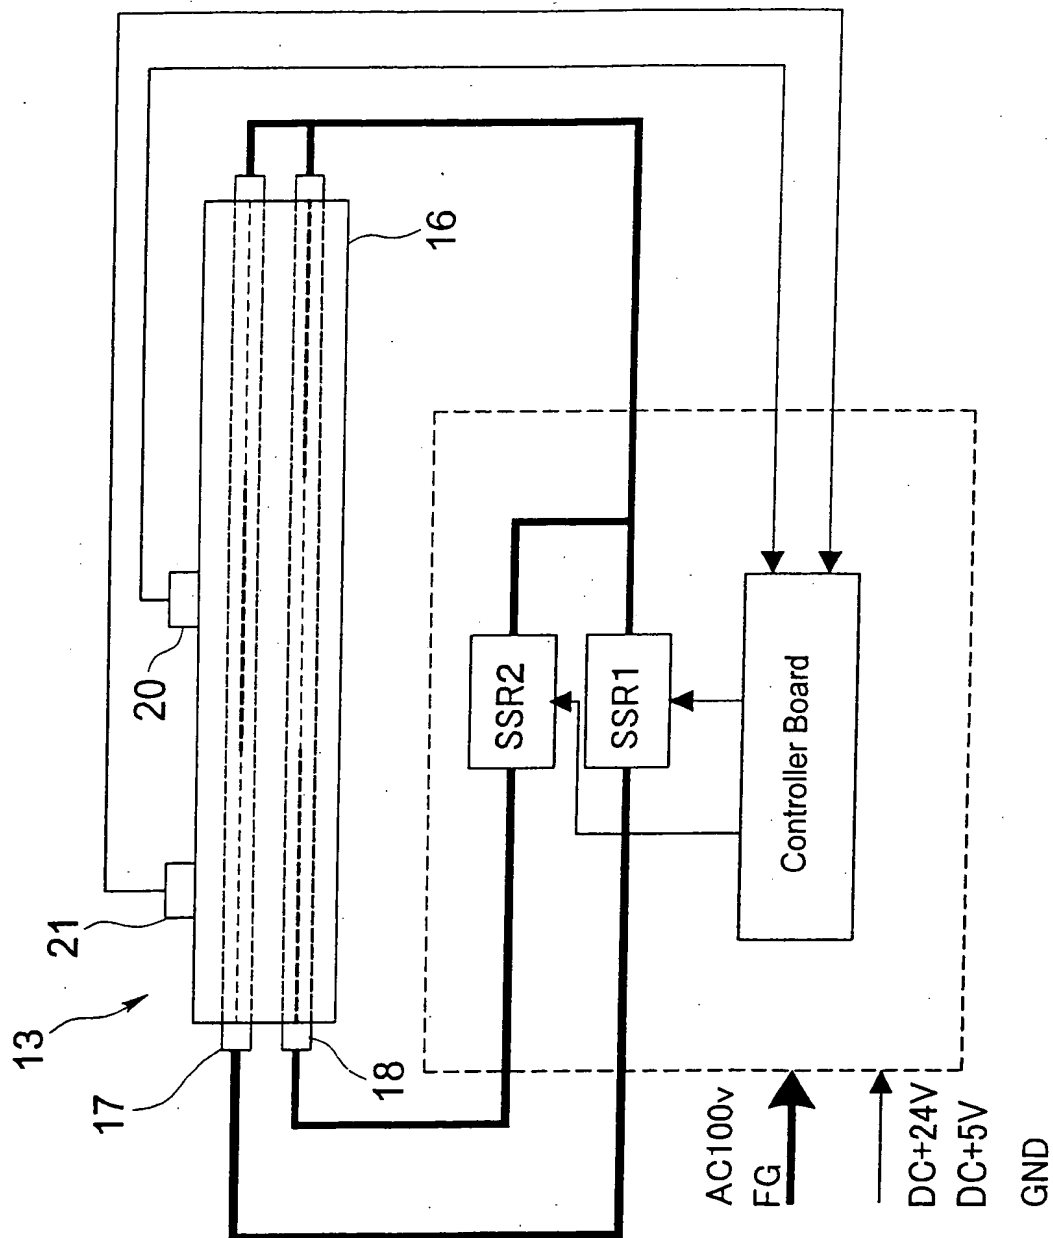


**FIG. 3**

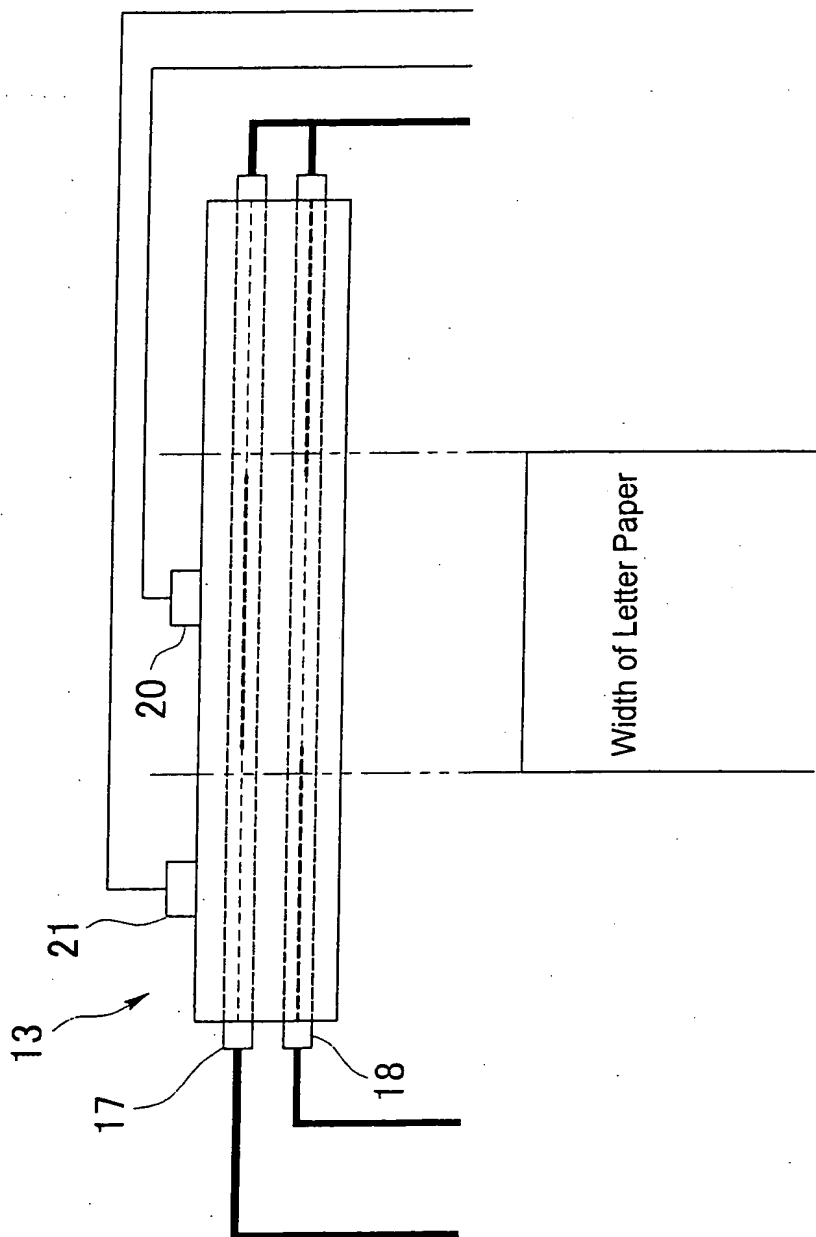

**FIG. 4**

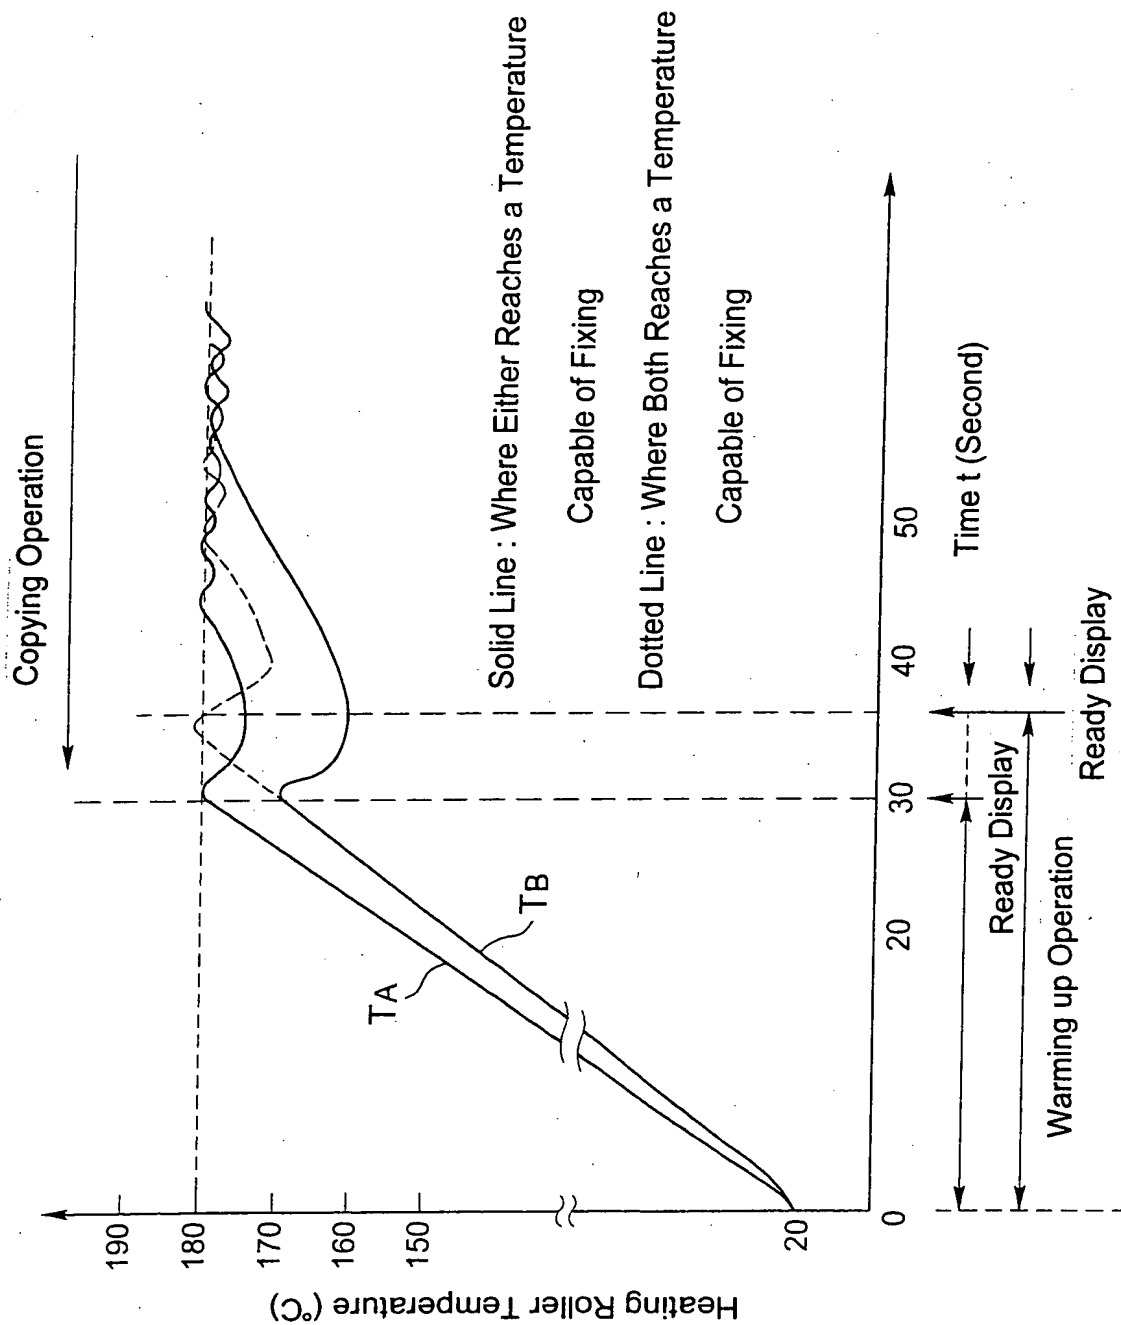

**FIG. 5**

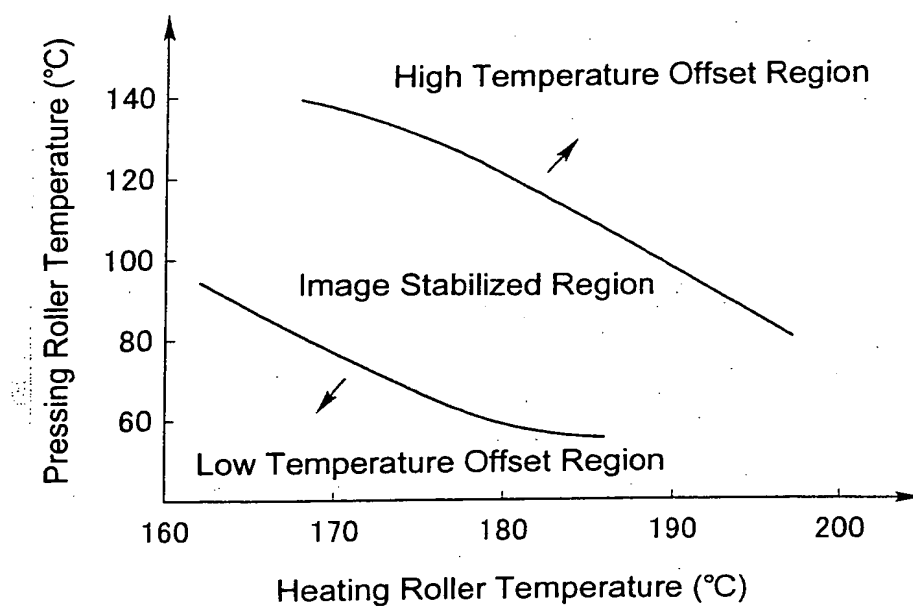

**FIG. 6**


using environment [°C]	temperature at termination of warming up		ready display (con-pane display)	lamp control
	lamp 17 (central portion)	lamp 18 (both ends)		
in excess of 16°C	$TA \geq WUC$	$TB < WUS$	lighted	only lamp 18 (both ends) forcibly turned on
	$TA < WUC$	$TB \geq WUS$	lighted	only lamp 17 (central) forcibly turned on
	$TA \geq WUC$	$TB \geq WUS$	lighted	forcible turn-on not carried out, proceed to normal control
less than 16°C	$TA \geq WUC$	$TB < WUS$	not lighted	warming up operation continued
	$TA < WUC$	$TB \geq WUS$	not lighted	warming up operation continued
	$TA \geq WUC$	$TB \geq WUS$	lighted	forcible turn-on not carried out, proceed to normal control

FIG. 7




86E



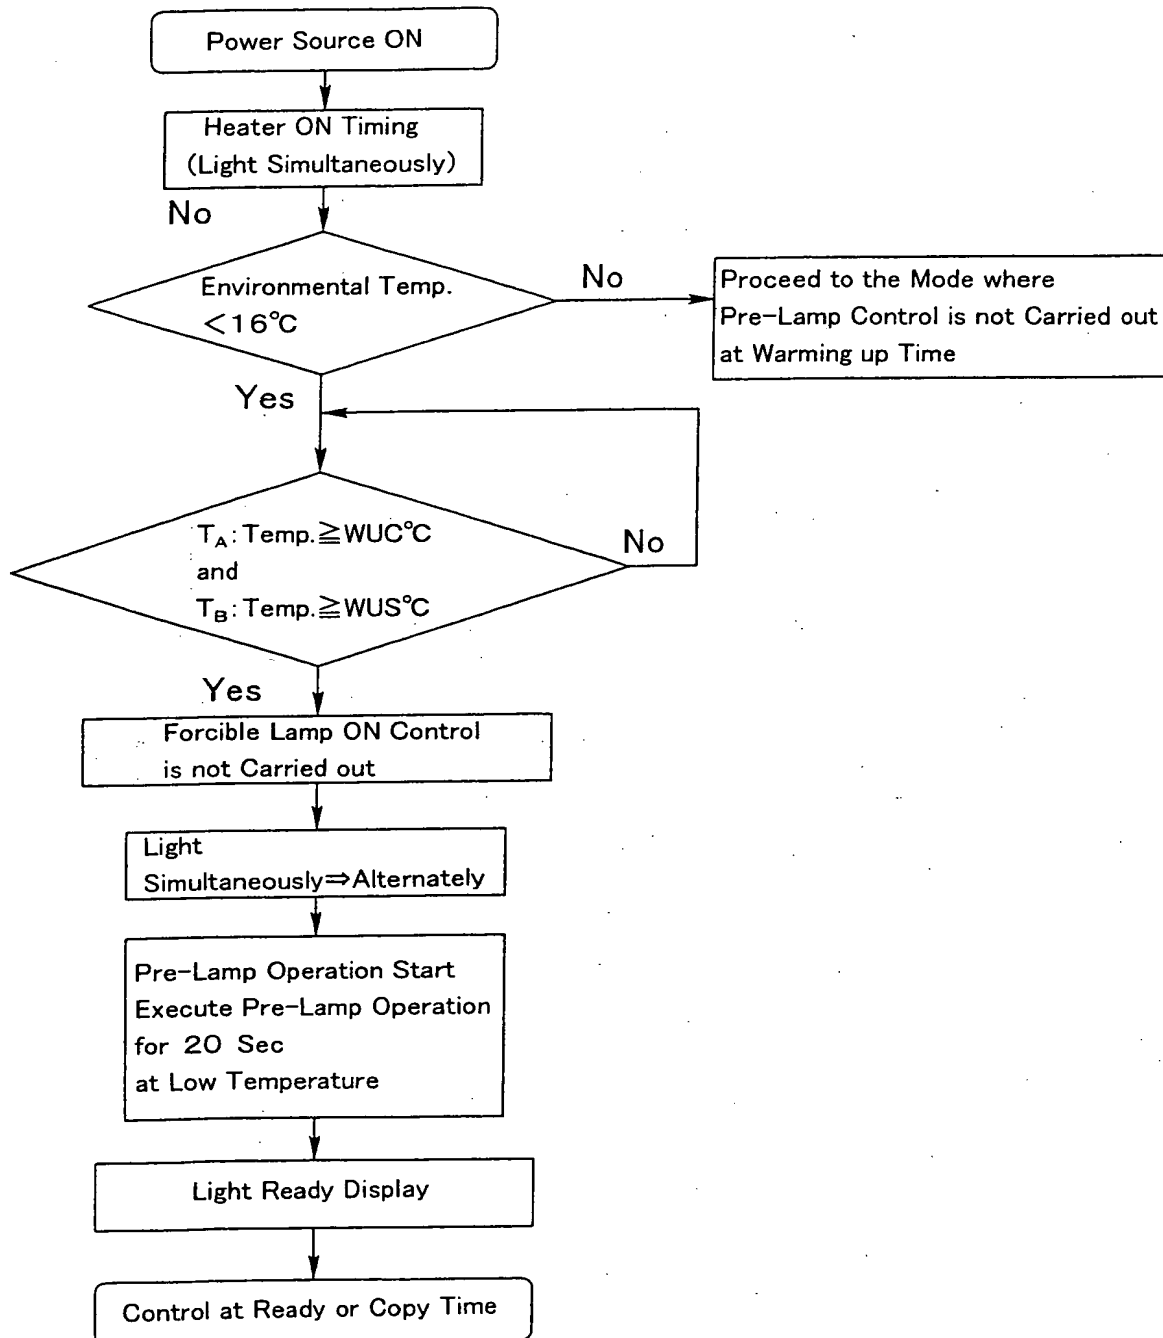

**FIG. 9**

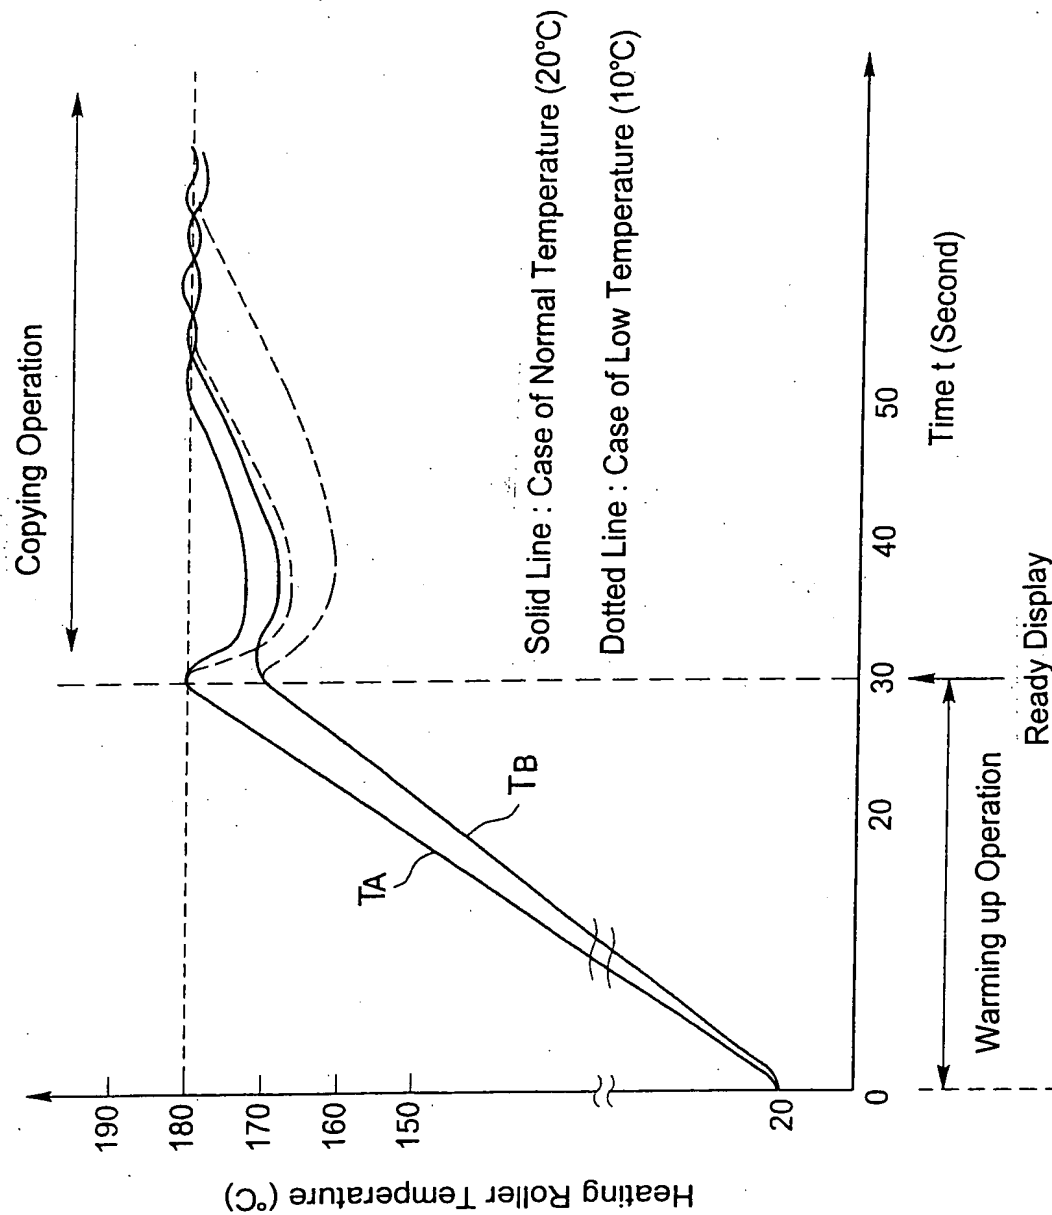

**FIG. 10**